



**QUICK SPECS**

Impact Rating	Class 3
Shingle Warranty*	Limited Lifetime
Non-Prorated Period	10 Years
Limited Wind Warranty	110 MPH
Enhanced Wind Warranty	130 MPH

Shown in Moonlit Black



**Sustainable Performance™**

*Superior Performance & Better for the Environment*

**CRAFTSMANSHIP**

- Up to 2x Larger Nailing Area
- Up to 50% More Adhesive Bonds
- 2x Rain Seals

**PERFORMANCE**

- Up to 10% Greater Tear Strength
- Up to 65% Greater Granule Adhesion
- Class 3 Impact Rating

**CIRCULAR SUSTAINABILITY  
[PER ROOF]**

- Upcycles ~4 Rubber Tires
- Upcycles ~2,900 Plastic Bags
- Cleans Smog Pollution like ~2 Trees

**Ecoasis®**

**Solar Reflective Shingles – Aging and Impact Resistant**

Ecoasis® shingles are made with our patented **NEX® Polymer Modified (SBS Rubberized) Asphalt**, an innovative technology that infuses rubber and plastic polymers to strengthen the asphalt core of the shingle for superior impact resistance, granule adhesion, all-weather resilience, and aging longevity.

**Ecoasis® shingles are also sustainable.** Upcycled polymers from used tires and plastic bags improve durability and aging resistance, while helping reduce landfill waste. And smog-reducing granules help clean the air of emission pollutants, like planting trees on your roof.









*Sustainability without sacrificing performance.*

**BEST IN CLASS**

Malarkey's Ecoasis® shingles are *Best In Class* – made with the **industry's leading technology** [NEX® SBS rubberized asphalt], **second-highest impact rating** [Class 3], **strongest sustainability** [aging longevity, upcycled rubber & plastic, smog-reducing granules], and **superior warranty protection** for peace of mind.

## Color Options

See shingle colors on a roof, or your roof, at [www.malarkeyroofing.com/roof-designer](http://www.malarkeyroofing.com/roof-designer).

 TITLE 24 CRRG RATED PRODUCT BLACK DUSK 0850-0071	 TITLE 24 CRRG RATED PRODUCT COASTAL GREY 0850-0068	 TITLE 24 TITLE 31 CRRG RATED PRODUCT BURLWOOD 0850-0057	 TITLE 24 TITLE 31 CRRG RATED PRODUCT MOONLIT BLACK 0850-0066	 TITLE 24 TITLE 31 CRRG RATED PRODUCT RIVERSTONE GREY 0850-0067	 TITLE 24 TITLE 31 CRRG RATED PRODUCT WILLOW WOOD 0850-0028																																																	
 TITLE 24 CRRG RATED PRODUCT DESERT BRUSH 0850-0069	 TITLE 24 CRRG RATED PRODUCT PACIFIC DRIFT 0850-0070	<table border="1"> <thead> <tr> <th>Licensed Manufacturer ID: 0850 Classification: Production Line</th> <th>Black Dusk</th> <th>Coastal Grey</th> <th>Desert Brush</th> <th>Pacific Drift</th> <th>Burlwood</th> <th>Moonlit Black</th> <th>Riverstone Grey</th> <th>Willow Wood</th> </tr> </thead> <tbody> <tr> <td>Solar Reflectance<sup>1</sup> [Aged]</td> <td>0.19*</td> <td>0.18*</td> <td>0.18*</td> <td>0.19*</td> <td>0.21</td> <td>0.20*</td> <td>0.20*</td> <td>0.20</td> </tr> <tr> <td>Thermal Emittance<sup>1</sup> [Aged]</td> <td>0.92*</td> <td>0.92*</td> <td>0.92*</td> <td>0.92*</td> <td>0.94</td> <td>0.92*</td> <td>0.92*</td> <td>0.92</td> </tr> <tr> <td>Solar Reflective Index<sup>1</sup> [SRI] [Aged]</td> <td>19*</td> <td>17*</td> <td>17*</td> <td>19*</td> <td>22</td> <td>20*</td> <td>20*</td> <td>20</td> </tr> <tr> <td>Related Product ID</td> <td>0850-0071</td> <td>0850-0068</td> <td>0850-0069</td> <td>0850-0070</td> <td>0850-0057</td> <td>0850-0066</td> <td>0850-0067</td> <td>0850-0028</td> </tr> </tbody> </table>								Licensed Manufacturer ID: 0850 Classification: Production Line	Black Dusk	Coastal Grey	Desert Brush	Pacific Drift	Burlwood	Moonlit Black	Riverstone Grey	Willow Wood	Solar Reflectance <sup>1</sup> [Aged]	0.19*	0.18*	0.18*	0.19*	0.21	0.20*	0.20*	0.20	Thermal Emittance <sup>1</sup> [Aged]	0.92*	0.92*	0.92*	0.92*	0.94	0.92*	0.92*	0.92	Solar Reflective Index <sup>1</sup> [SRI] [Aged]	19*	17*	17*	19*	22	20*	20*	20	Related Product ID	0850-0071	0850-0068	0850-0069	0850-0070	0850-0057	0850-0066	0850-0067	0850-0028
Licensed Manufacturer ID: 0850 Classification: Production Line	Black Dusk	Coastal Grey	Desert Brush	Pacific Drift	Burlwood	Moonlit Black	Riverstone Grey	Willow Wood																																														
Solar Reflectance <sup>1</sup> [Aged]	0.19*	0.18*	0.18*	0.19*	0.21	0.20*	0.20*	0.20																																														
Thermal Emittance <sup>1</sup> [Aged]	0.92*	0.92*	0.92*	0.92*	0.94	0.92*	0.92*	0.92																																														
Solar Reflective Index <sup>1</sup> [SRI] [Aged]	19*	17*	17*	19*	22	20*	20*	20																																														
Related Product ID	0850-0071	0850-0068	0850-0069	0850-0070	0850-0057	0850-0066	0850-0067	0850-0028																																														

**Note:** CRRG-rated colors can be used to comply with California Energy Code [CEC] Title 24, Part 6 Cool Roof Requirements. Colors with an SRI of 20 or greater can also be used to comply with Los Angeles County, California Title 31 Cool Roof Requirements.

<sup>1</sup>Results are CRRG listings unless marked otherwise. \*Solar reflectance data calculated using the California Energy Commission SRI Calculation Worksheet.

## Performance Engineered, Sustainably Designed

### NEX® RUBBERIZED ASPHALT

Asphalt core of shingle is rubberized with virgin synthetic rubber polymers (SBS) to enhance shingle strength, flexibility, and aging resistance. **Class 3 impact rating (second-highest rating possible).** Insurance discounts may apply.

### UPCYCLED RUBBER & PLASTIC

Polymers from recycled rubber and plastic improve shingle durability and aging resistance, while **diverting the equivalent of ~4 rubber tires and ~2,900 plastic bags from the landfill per roof.**<sup>1</sup>

### ADHESIVE BONDS

Synthetic rubber adhesive (SEBS) resists dry-out and delivers extreme seal-down strength against high winds, wind-driven rain, and delamination. **Up to 50% more laminate bonds and 2X the rain seals of standard shingles.**

### THE ZONE® LARGER NAILING AREA

**Up to 2X larger nailing**, with longer and tapered shingle backing, dramatically improves installation accuracy, helps ensure nails secure BOTH shingle layers to help prevent blowoffs, and reduces the risk of leaks from troughing. **Up to 130 MPH wind warranty.**

### FIBERGLASS MAT

Provides structural reinforcement, and combined with polymer modified asphalt, **up to 10% greater tear strength than the industry standard (ASTM D3462).**

### 3M™ ROOFING GRANULES

Deeply embedded, ceramic-coated granules protect shingle from weather and UV aging. **Up to 65% greater granule adhesion than the industry standard (ASTM D3462).**

### 3M™ SMOG-REDUCING GRANULES

Clean the air of emission pollutants. **Each roof has the smog-fighting potential of ~2 trees.**<sup>2</sup>

### 3M™ COOL ROOFING GRANULES

Reflect sun's rays to reduce roof heat. SRI Ratings up to 22.

 Malarkey Industry Firsts



Improving Our Climate  
3M™ Smog-Reducing Granules



MEETS CSA A123.5  
STANDARDS

<sup>1</sup> Assumes roof of 30 squares.

<sup>2</sup> Assumes roof of 30 squares. Source: Lawrence Berkeley National Laboratory and 3M.

**Test Compliance** – ASTM D7158 Class H, ASTM D3462, ASTM D3161 Class F, ASTM D3018 Type I, ASTM E108 Class A Fire Rating, UL 2218 Class 3, CSA A123.5, ICC Approval – ESR-3150, and ICC-ES AC438. CRRG-rated colors can be used to comply with California Energy Code [CEC] Title 24, Part 6 Cool Roof Requirements [Ecoasis® Black Dusk, Burlwood, Coastal Grey, Desert Brush, Moonlit Black, Pacific Drift, Riverstone Grey, and Willow Wood]. Ecoasis® Burlwood, Moonlit Black, Riverstone Grey, and Willow Wood shingles can also be used to comply with Los Angeles County, California Title 31 Cool Roof Requirements.

**Disclaimer:** Photographs of shingles may not accurately represent their true color or the variations of color blends that will appear on the roof. **Before installation, five or six shingles should be laid out and reviewed for desired color.** Colors and specifications subject to change without notice. Shingle colors not available in all regions.

+ For complete warranty information, please reference Malarkey's **Shingle and Accessory Warranty** available at [www.malarkeyroofing.com/warranties](http://www.malarkeyroofing.com/warranties).

This version supersedes all previous versions. Rev. 11/23

[www.malarkeyroofing.com](http://www.malarkeyroofing.com)  
800-545-1191  
Made in South Gate, CA







Shown in Silverwood

**QUICK SPECS**

Impact Rating	Class 3
Shingle Warranty*	Limited Lifetime
Non-Prorated Period	10 Years
Limited Wind Warranty	110 MPH
Enhanced Wind Warranty	130 MPH



**Sustainable Performance™**

*Superior Performance & Better for the Environment*

**CRAFTSMANSHIP**

- Up to 2x Larger Nailing Area
- Up to 50% More Adhesive Bonds
- 2x Rain Seals

**PERFORMANCE**

- Up to 10% Greater Tear Strength
- Up to 65% Greater Granule Adhesion
- Class 3 Impact Rating

**CIRCULAR SUSTAINABILITY  
[PER ROOF]**

- Upcycles ~4 Rubber Tires
- Upcycles ~2,900 Plastic Bags
- Cleans Smog Pollution like ~2 Trees

# Highlander®

## Architectural Shingles – Aging and Impact Resistant

Highlander® shingles are made with our patented **NEX® Polymer Modified [SBS Rubberized] Asphalt**, an innovative technology that infuses rubber and plastic polymers to strengthen the asphalt core of the shingle for superior impact resistance, granule adhesion, all-weather resilience, and aging longevity.

**Highlander® shingles are also sustainable.** Upcycled polymers from used tires and plastic bags improve durability and aging resistance, while helping reduce landfill waste. And smog-reducing granules help clean the air of emission pollutants, like planting trees on your roof.

*Sustainability without sacrificing performance.*

### BEST IN CLASS

Malarkey's Highlander® shingles are *Best In Class* – made with the **industry's leading technology** [NEX® SBS rubberized asphalt], **second-highest impact rating** [Class 3], **strongest sustainability** [aging longevity, upcycled rubber & plastic, smog-reducing granules], and **superior warranty protection** for peace of mind.

## Color Options

See shingle colors on a roof, or your roof, at [www.malarkeyroofing.com/roof-designer](http://www.malarkeyroofing.com/roof-designer).



## Performance Engineered, Sustainably Designed

### NEX® RUBBERIZED ASPHALT

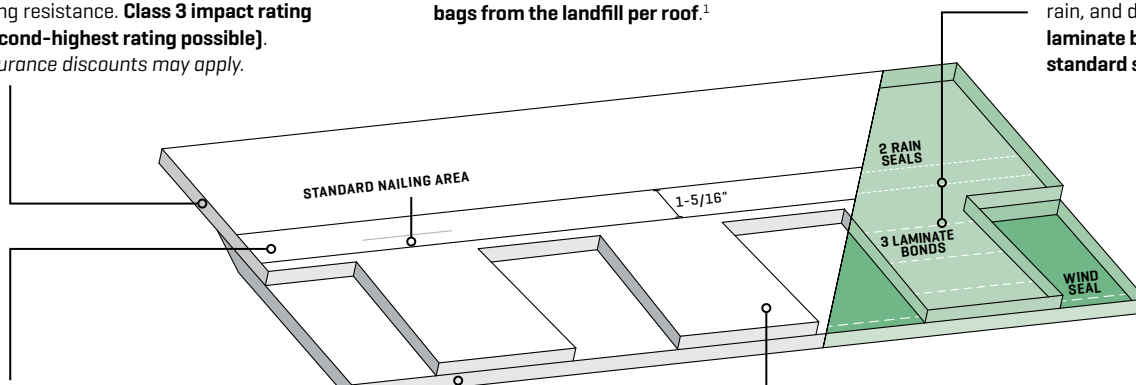
Asphalt core of shingle is rubberized with virgin synthetic rubber polymers (SBS) to enhance shingle strength, flexibility, and aging resistance. **Class 3 impact rating [second-highest rating possible].** Insurance discounts may apply.

### UPCYCLED RUBBER & PLASTIC

Polymers from recycled rubber and plastic improve shingle durability and aging resistance, while **diverting the equivalent of ~4 rubber tires and ~2,900 plastic bags from the landfill per roof.**<sup>1</sup>

### ADHESIVE BONDS

Synthetic rubber adhesive (SEBS) resists dry-out and delivers extreme seal-down strength against high winds, wind-driven rain, and delamination. **Up to 50% more laminate bonds and 2X the rain seals of standard shingles.**



### THE ZONE® LARGER NAILING AREA

**Up to 2X larger nailing**, with longer and tapered shingle backing, dramatically improves installation accuracy, helps ensure nails secure BOTH shingle layers to help prevent blowoffs, and reduces the risk of leaks from troughing. **Up to 130 MPH wind warranty.**

### FIBERGLASS MAT

Provides structural reinforcement, and combined with polymer modified asphalt, **up to 10% greater tear strength than the industry standard (ASTM D3462).**

### 3M™ ROOFING GRANULES

Deeply embedded, ceramic-coated granules protect shingle from weather and UV aging. **Up to 65% greater granule adhesion than the industry standard (ASTM D3462).**

### 3M™ SMOG-REDUCING GRANULES

Clean the air of emission pollutants. **Each roof has the smog-fighting potential of ~2 trees.**<sup>2</sup>

**Malarkey Industry Firsts**



<sup>1</sup> Assumes roof of 30 squares.

<sup>2</sup> Assumes roof of 30 squares. Source: Lawrence Berkeley National Laboratory and 3M.

**Test Compliance** – ASTM D7158 Class H, ASTM D3462, ASTM D3161 Class F, ASTM D3018 Type I, ASTM E108 Class A Fire Rating, UL 2218 Class 3, CSA A123.5, ICC Approval – ESR-3150, and ICC-ES AC438. CRRC-rated colors can be used to comply with California Energy Code (CEC) Title 24, Part 6 Cool Roof Requirements (Highlander® Golden Amber, Ivory Mist, Sienna Blend, and Silverwood only). Highlander® Golden Amber, Ivory Mist, Sienna Blend, and Silverwood shingles can also be used to comply with Los Angeles County, California Title 31 Cool Roof Requirements.

**Disclaimer:** Photographs of shingles may not accurately represent their true color or the variations of color blends that will appear on the roof. **Before installation, five or six shingles should be laid out and reviewed for desired color.** Colors and specifications subject to change without notice. Shingle colors not available in all regions.

+ For complete warranty information, please reference Malarkey's **Shingle and Accessory Warranty** available at [www.malarkeyroofing.com/warranties](http://www.malarkeyroofing.com/warranties).

This version supersedes all previous versions. Rev. 11/23

[www.malarkeyroofing.com](http://www.malarkeyroofing.com)  
800-545-1191  
Made in South Gate, CA

